
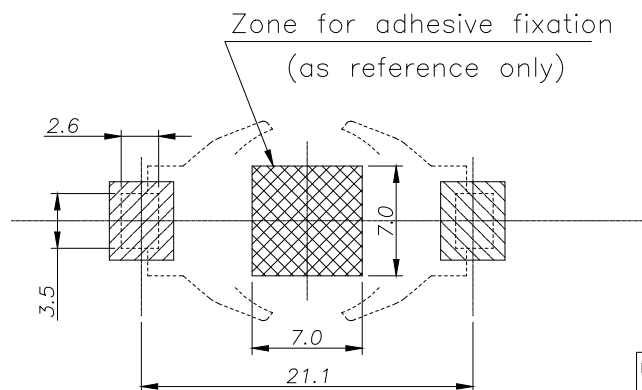

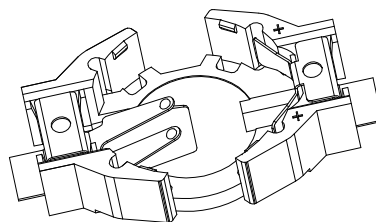
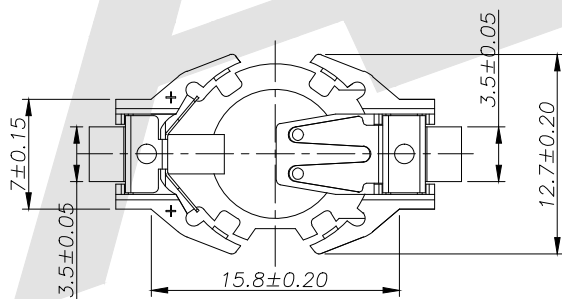
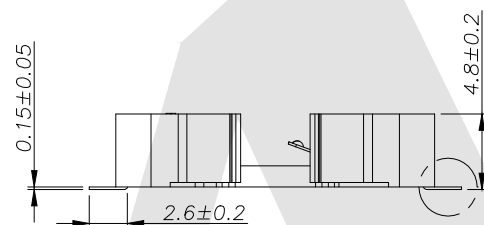


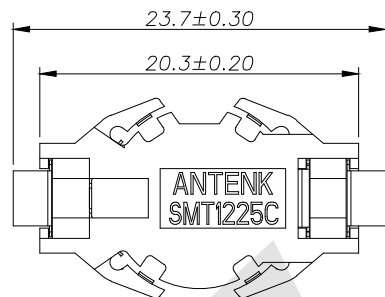

PCB LAYOUT (TOP VIEW)

NOTES:

- 1.Housing: LCP E130i,UL94V-0 UL No:E106764 Colr:Nature
- 2.Contact: Spring Stainless Steel 301 First Grade,T=0.15mm
High Temp Tin Plated 100-200U'' over Nickel 30u''
- 3.Working Temp: -40° C To +100° C


Order Code:

BT - M - SN - X -1225C
① ② ③ ④ ⑤

- ① BT:Coin Cell Holders
- ② Apperance For The Product
M:SMT TYPE
S:180 TYPE
R:90 TYPE
- ③ Contact Plating
SN:Tin
G0:Gold flash G1: 3U'' Gold
G2: 5U'' Gold G3:10U'' Gold
G4:15U'' Gold G5:30U'' Gold
- ④ Packing Method
A: Tray Packing
R: Tape & Reel Packing
- ⑤ Product Number
1225C

Unless Otherwise specified tolerance
X. ±0.38 X.XX:±0.20
X.X:±0.25 X.XXX:±0.10

SCALE: As Shown UNIT: mm
DRAW Gong Feng DATE 11/9/2020
CHECK BobYang DATE 11/09/2020



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

Coin Cell Holders SMT For 1225C

DRAWING NO: BS-M-SN-X-1225C

PRODUCT NO: BS-M-SN-X-1225C



Update

02/08/2021

DESCRIPTION

DATE


REV

HSF



RoHS

ITEM	W	A0	B0	K0	K1	P	F	E	D	P0	P2	T	13"	
DIM	44.0	13.6	24.2	4.9	0.0	16	0.0	1.75	1.50	4.00	2.00	0.35	长度/盘	元件/盘
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.15 -0.15	+0.05 -0.05	M	750pcs

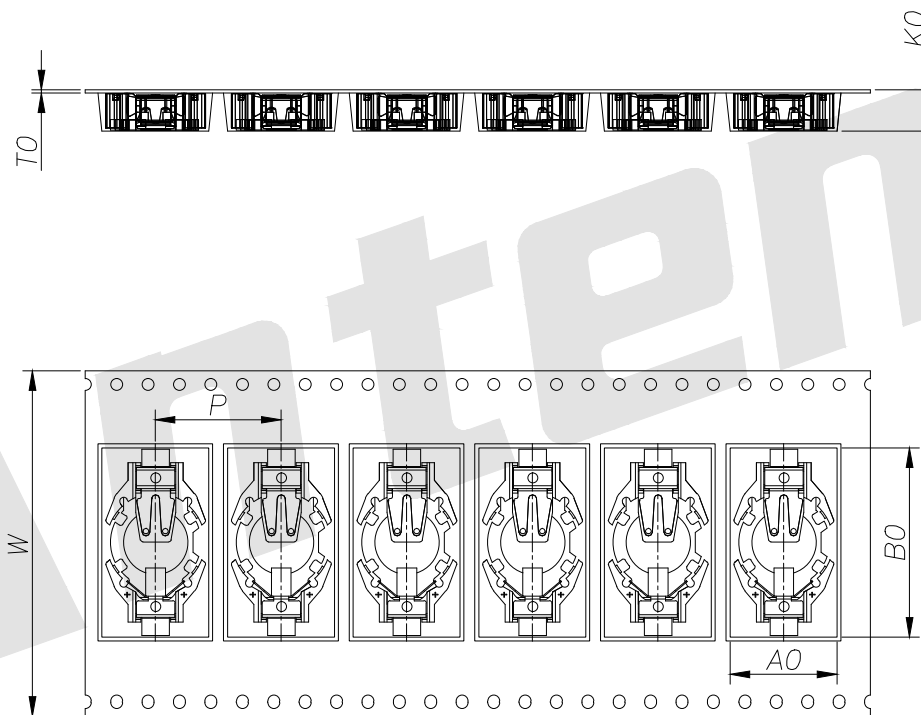


REMARK:

- (1) The cumulative error of any 10 ratchet holes shall not exceed $+/-0.20\text{mm}$;
- (2) The thickness of the material shall be measured at the edge of the belt;
- (3) The non parallelism of 100 mm distance in the direction of belt length shall not exceed 1 mm;
If it exceeds 250mm, the accumulated error will not be calculated;
- (4) The tolerance range not specified is $+/-0.1\text{mm}$;
- (5) A0 and B0 are measured at the bottom 0.3mm up inside the cavity, and K0 is the internal depth.
- (6) Chamfer R is 0.2-0.3 for cavity shape where it is not indicated
- (7) 5° if not indicated

Unless Otherwise specified tolerance
X. ± 0.38 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.10

SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 08/02/2021
CHECK BobYang	DATE 08/02/2021



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

Coin Cell Holders SMT For 1225C Tape And Reel

DRAWING NO: BS-M-SN-X-1225C

PRODUCT NO: BS-M-SN-X-1225C

REV	DESCRIPTION	DATE
		02/08/2021